


Commercial/Industrial COLOR CHART

SIGNATURE® 200 Standard Colors SILICONIZED POLYESTER

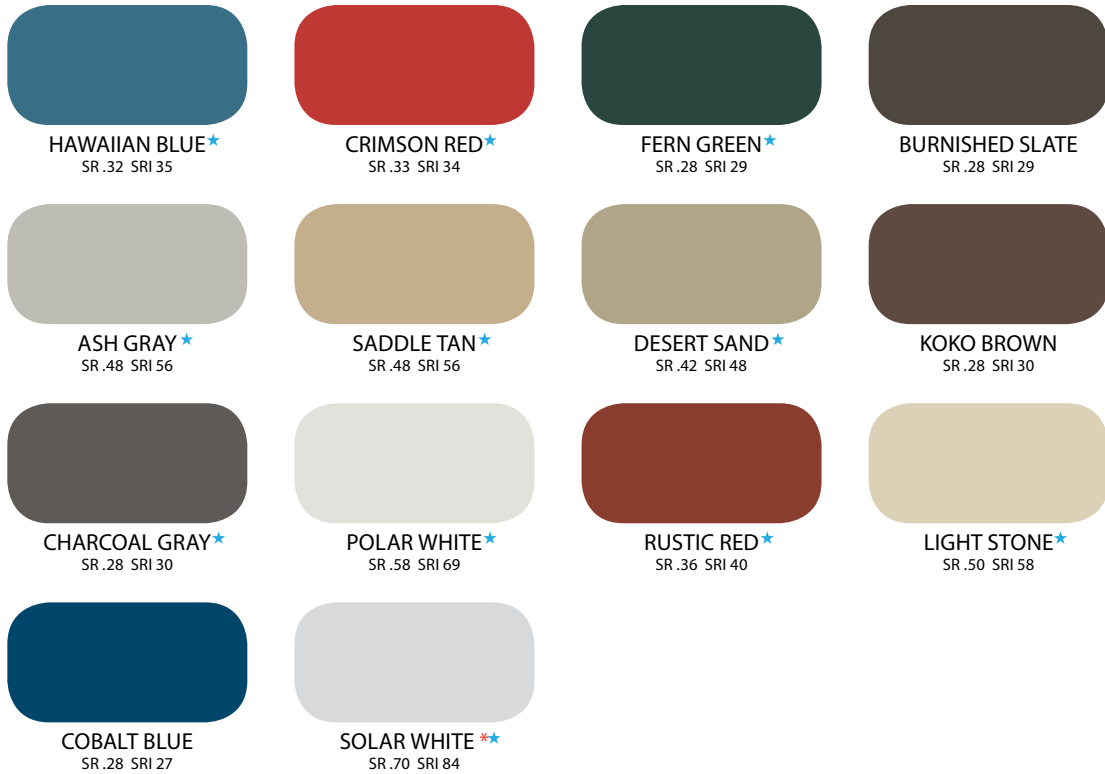

- Final color selection should be made from actual color chips.
- See product selection chart for gauge and color availability.
- All products available in smooth or embossed finish.
- Trim available in all colors.
- All Signature® 300 are low gloss colors.
- Polar White is a Straight Polyester.
- A 25-year limited paint warranty available for all colors upon written request. (Outside the continental United States, please inquire.)
- Signature® is a registered trademark of NCI Group, Inc. KYNAR 500® is a registered trademark of Arkema, Inc. HYLAR® 5000 is a registered trademark of Solvay Solexis.

SIGNATURE® 300 Premium Colors KYNAR 500®, HYLAR® 5000

Additional costs apply for Signature 300 finishes.



- ★ ENERGY STAR® Qualified Color through our ENERGY STAR® partners, MBCI.
- * This color is California Title 24 compliant. Availability in certain areas may be restricted or require a surcharge.

Commercial/Industrial Panel Profiles

What is Solar Reflectivity (SR)?

Solar reflectivity or reflectance (SR) is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates it is all reflected. Energy Star requires SR testing of both new and aged roof products. New products must have an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. Aged testing takes 3 years to complete, so not all products that meet the initial requirements are qualified. For more information, please go to www.energystar.gov.

What is Solar Reflectivity Index (SRI)?

The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please go to www.usgbc.org.



SIGNATURE® 200 - SILICONIZED POLYESTER

	SR Value	SRI Value
HAWAIIAN BLUE	.32	35
CRIMSON RED	.33	34
FERN GREEN	.28	29
BURNISHED SLATE	.28	29
ASH GRAY	.48	56
SADDLE TAN	.48	56
DESERT SAND	.42	48
KOKO BROWN	.28	30
CHARCOAL GRAY	.28	30
POLAR WHITE	.58	69
RUSTIC RED	.36	40
LIGHT STONE	.50	58
COBALT BLUE	.28	27
SOLAR WHITE	.70	84

SIGNATURE® 300 - KYNAR 500® / HYLAR® 5000

	SR Value	SRI Value
MEDIUM BRONZE	.33	36
SNOW WHITE	.65	79
SLATE GRAY	.37	41
ALMOND	.63	76
CLASSIC GREEN	.28	30
BROWNSTONE	.47	54
BRITE RED	.49	55
HARBOR BLUE	.28	30
BONE WHITE	.70	84

PRODUCT Selection Chart

Profile	Panel	29 GAUGE			26 GAUGE			24 GAUGE			22 GAUGE		
		Galvalume Plus®	Sig 200 (Liner Only)		Galvalume Plus®	Sig 200	Sig 300	Galvalume Plus®	Sig 200	Sig 300	Galvalume Plus®	Sig 200	Sig 300
	PBR	●	■	●	●	■	●	■	■	■	■	■	
	PBU	●	■	●	●	■	●	■	■	■	■	■	
	PBC	●	■	●	●	■	●	■		■	■		
	PBD	●	■	●	●	■	●	■		■	■		
	AVP	●	■	●	●	■	●	■	■	■	■	■	

● Available in any quantity, no minimum required. ■ May require minimum quantity